

DS-9600NI-I16 Series NVR



Features and Functions

Professional and Reliable

- Dual-OS design to ensure high reliability of system running
- ANR technology to enhance the storage reliability when the network is disconnected
- HDD hot swap with RAID0, RAID1, RAID5, RAID6 and RAID10 storage scheme configurable
- Either Normal or Hot Spare working mode is configurable to constitute an N+1 hot spare system.

HD Input

- H.265/H.264/MPEG4 video formats
- Connectable to the third-party network cameras
- Up to 64 IP cameras can be connected
- Recording at up to 12 MP resolution
- Supports live view, storage, and playback of the connected camera at up to 12 MP resolution

HD Output

- HDMI1/VGA1 and HDMI2/VGA2 outputs provided
- HDMI1 Video output at up to 4K (3840 × 2160) resolution

HD Storage

- Up to 16 SATA interfaces and 1 eSATA interface connectable for recording and backup
- Storage space effectively saved by 50% to 70% with the use of H.264+ decoding format

HD Transmission

- 2 self-adaptive 10M/100M/1000M network interfaces, and two working modes are configurable: multi-address and network fault tolerance

Various Applications


- Centralized management of IP cameras, including configuration, information import/export, real-time information display, two-way audio, upgrade, etc.
- Connectable to smart IP cameras from Hikvision and the recording, playing back, and backing up of VCA alarms can be realized
- VCA detection alarm is supported
- Instant playback for assigned channel during multi-channel display mode
- Smart search for the selected area in the video; and smart playback to improve the playback efficiency
- Supports HDD quota and group modes; different capacity can be assigned to different channels



Specifications

Model		DS-9616NI-I16	DS-9632NI-I16	DS-9664NI-I16
Video/Audio input	IP video input	16-ch	32-ch	64-ch
	Incoming bandwidth	256 Mbps	320 Mbps	320 Mbps
	Outgoing bandwidth	256 Mbps, or 200 Mbps (when RAID is enabled)		
Video/Audio output	VGA1 /HDMI1 output resolution	HDMI1: 4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA1: 2K (2560 × 1440)/60Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
	VGA2 /HDMI2 output resolution	1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
	Audio output	2-ch, RCA (Linear, 1 K Ω)		
Decoding	Decoding format	H.265/H.264/MPEG4		
	Recording resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF		
	Synchronous playback	16-ch		
	Capability	4-ch @ 4K or 16-ch @ 1080p		
Hard disk	SATA	16 SATA interfaces		
	eSATA	1 eSATA interface		
	Capacity	500GB/1TB/2TB/3TB/4TB/5TB/6TB		
Disk array	Array type	RAID0, RAID1, RAID5, RAID6, RAID10		
VCA	VCA events	IPC uploading supported		
External interface	Two-way audio	1-ch, RCA (2.0 Vp-p, 1 k Ω)		
	Network interface	2, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface		
	Serial interface	RS-232; RS-485; Keyboard		
	USB interface	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0		
	Alarm in/out	16/8		
General	Power supply	100 to 240 VAC, 50 to 60 Hz		
	Max. Power	300 W		
	Consumption (without hard disk)	≤ 45 W		
	Working temperature	-10 to +55° C (14 to 131° F)		
	Working humidity	10 to 90 %		
	Chassis	19-inch rack-mounted 3U chassis		
	Dimensions (W × D × H)	445 × 496 × 146 mm (17.5 × 19.5 × 5.7")		
	Weight (without hard disk)	≤ 12.5 kg (27.6 lb)		

Physical Interfaces

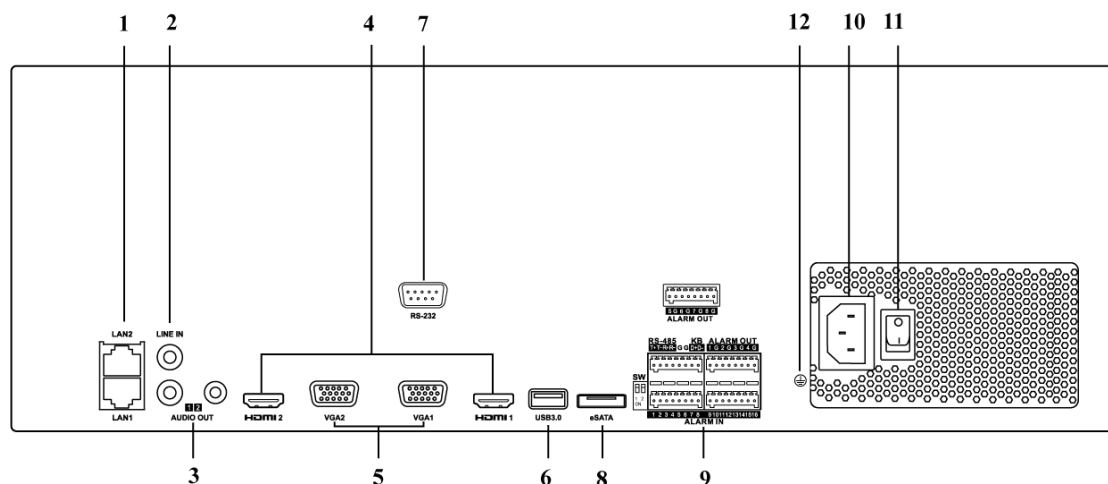

Index	Description	Index	Description
1	LAN1/LAN2 Interface, 2 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interfaces provided.	7	RS-232 Interface
2	LINE IN, RCA connector for audio input.	8	eSATA Interface
3	AUDIO OUT, RCA connector for audio output.	9	Controller Port, Alarm In/Alarm Out
4	HDMI1/HDMI2, HDMI video output connector.	10	100 to 240 VAC power supply
5	VGA1/VGA2, DB9 connector for VGA output. Display local video output and menu.	11	Power Switch
6	USB 3.0 Interface	12	GND

Available Models

DS-9616NI-I16, DS-9632NI-I16, DS-9664NI-I16

Distributed by

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +44-1628-9021-4
support.uk@hikvision.com

Hikvision Europe
T +31-23-5542770
saleseuro@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision France
T +33(0)1-85-330-444
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Hong Kong
T +852-2151-1761